



HTS9 Technical Specifications

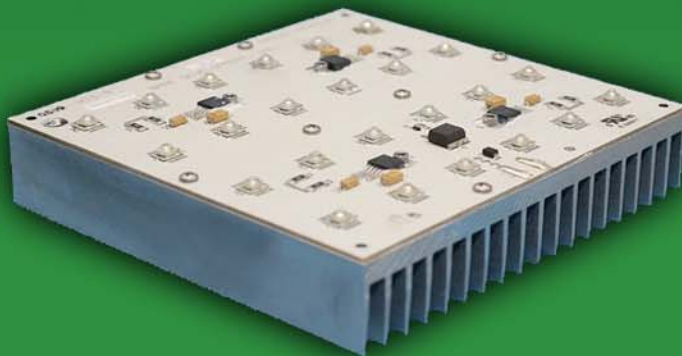


LED Board

Manufacturer	Bare Development Inc
Model	HTS9
LED Manufacturer	CREE
LED Model	XLamp XR-E
LED Count	24
Solder	Patented Nickel Technique
Life Expectancy	>50,000h
Listed Wattage	59
Tested Wattage	57.4
Certification	UL 8750
Mounting Bracket	Custom Per Order
Min Mounting Space	12" Diameter

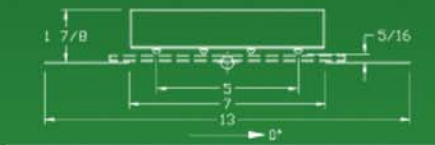

LED Driver



Manufacturer	High Perfection Tech
Model	LP1090-24-GG-299
Input Range	90 to 246 VAC, Full Range or 100-277VAC
Frequency	47 TO 63HZ
Power Factor	>0.95 at full load, 115VAC
Crest Factor	1.5 Max
Inrush Current	40.0 Amps maximum at 230VAC, cold start 25° C
Efficiency	85% typical at 230VAC AND Maximum Load
EMI/EMC Filtering	47CFR, Part 2, Part 15 and Cisper PUB, 22 Class A
Maximum Power	96w
Current Adjust Range	30~50%
Load Regulation	±3%
Leakage Current	0.2mA @ 110VAC, 0.4mA @ 230VAC
Hold Up Time	Half Cycle Minimum at 120VAC and 80% Rated Load
Protection	Over-Voltage, Over-Current, Over-Power and Short Circuit Protection: Auto-Recovery
Seal Rating	IP67
Operating Temperature	-30 to 70°C
Cooling	Convection
Humidity	5% - 95%
Vibration Frequency	5 to 50Hz
MTBF	>100,000 Hours at Full Load
Certification	UL 1310 / UL Class 2, CE

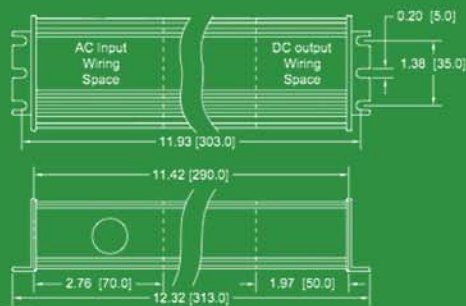

Photometric Info

Testing Procedure	LM-79-08	Maximum Plane & Maximum Cone Plots of Candela
Cutoff Classification	Full Cutoff	
Lumens	1444	
Efficiency (lm/w)	37.8	
Nominal lm/w	87.9	
CRI	75	
Color Temperature (k)	5600 - Cool White	
Chromacity Coordinate x	0.3215	
Chromacity Coordinate y	0.3415	
ANSI C78.377-2008 Duv	0.005	
IES Files	Available	

ISO footcandles lines of Horizontal Illumination 20' Mounting Height

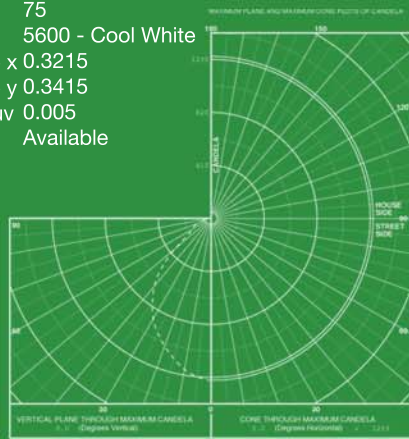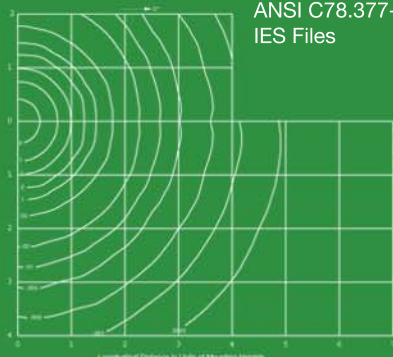

"High Tech Solutions"

Bare Development Inc.
Head Office 5425 9th Ave
Countryside, IL 60525



PROFESSIONAL SUPPLY INC.
504 Liberty Street, Fremont, OH 43420
419-332-7373 * Fax 419-332-6816
e-mail kim.henderson@professionalsupplyinc.com
www.solarsolutionsbypsi.com